


# 07 LED Version

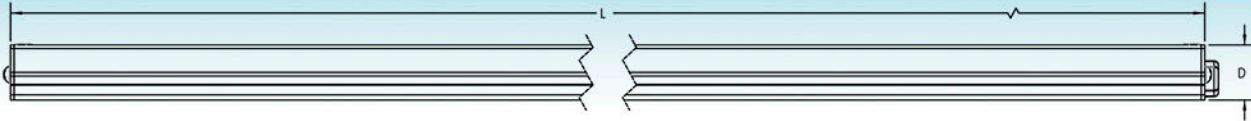

NAICS Code #335122 / 335110  
CAGE/NCAGE #58AB4 • GSA schedule #56

Contact ElectraLED for details

Performance Data									
Model #s (See Ordering Guide)	Details	Lumens @ 4000K	CRI (Typ)	Input Voltage (VDC)	Input Power (W)	Life L70	Dimensions		
							(L)	(W)	(D)
EFDS-1-KK-07-MM	1'	251	85	24.0	2.4	64,000	12.58"	1.13"	0.70"
EFDS-2-KK-07-MM	2'	502			4.8		23.58"		
EFDS-3-KK-07-MM	3'	753			7.2		34.58"		
EFDS-4-KK-07-MM	4'	1,004			9.6		45.58"		
EFDS-5-KK-07-MM	5'	1,255			12.0		56.58"		
EFDS-6-KK-07-MM	6'	1,506			14.4		67.58"		

KK = Color Temperature  
MM = Mounting Option



Power Supply *					
Model	Description	Input Voltage (VAC)	Output Voltage (VDC)	Total Harmonic Distortion	Power Factor (PF)
100W PS	100 watt	120/277	24	<20%	0.99
24W PS	24 watt	120/277	24	<20%	0.99


\*Note: Suggested Load 90%

ORDERING GUIDE			Example: EFDS-6-40-07-NM		
Model	Length	CCT (K)	LED/ft	Standard Mounting	Daisy Chain Mounting w Connections <sup>**</sup> / <sup>***</sup>
EFDS	1'	27 = 2700	07	NM = End	NMC = End
	2'	30 = 3000		NP = Pivot	NPC = Pivot
	3'	35 = 3500		NA = Magnet	NAC = Magnet
	4'	40 = 4000		PA = Pivot Magnet	PAC = Pivot Magnet
	5'	50 = 5000			
	6'				

Specifications subject to change without notice  
Optional dimming kit available upon request  
\*\*Note: One EFDS-1055 needed per run  
\*\*\* Note: See daisy chain spec guide

This product complies with IEEE C62.41 for surge endurance up to 2.5KV. ElectraLED® recommends using the SP20-TN for additional surge protection. Surge damage is not covered by warranty.

# 14 LED Version

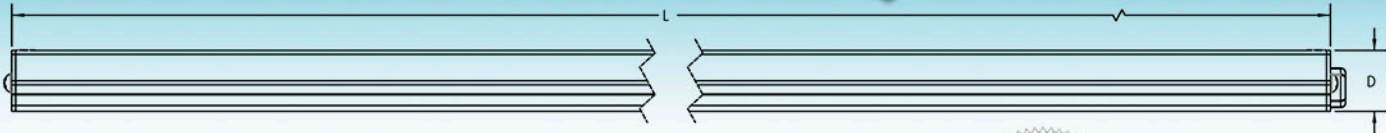

NAICS Code #335122 / 335110  
CAGE/NCAGE #58AB4 • GSA schedule #56



Contact ElectraLED for details

Performance Data									
Model #s (See Ordering Guide)	Details	Lumens @ 4000K	CRI (Typ)	Input Voltage (VDC)	Input Power (W)	Life L70	Dimensions		
							(L)	(W)	(D)
EFDS-1-KK-14-MM	1'	502	85	24.0	4.8	64,000	12.58"	1.13"	0.70"
EFDS-2-KK-14-MM	2'	1,004			9.6		23.58"		
EFDS-3-KK-14-MM	3'	1,506			14.4		34.58"		
EFDS-4-KK-14-MM	4'	2,008			19.2		45.58"		
EFDS-5-KK-14-MM	5'	2,510			24.0		56.58"		
EFDS-6-KK-14-MM	6'	3,012			28.8		67.58"		

KK = Color Temperature  
MM = Mounting Option



Power Supply *					
Model	Description	Input Voltage (VAC)	Output Voltage (VDC)	Total Harmonic Distortion	Power Factor (PF)
100W PS	100 watt	120/277	24	<20%	0.99
24W PS	24 watt	120/277	24	<20%	0.99

\* Note: Suggested Load 90%

ORDERING GUIDE			Example: EFDS-6-40-14-NM		
Model	Length	CCT (K)	LED/ft	Standard Mounting	Daisy Chain Mounting w Connections**/***
EFDS	1'	27 = 2700	14	NM = End	NMC = End
	2'	30 = 3000		NP = Pivot	NPC = Pivot
	3'	35 = 3500		NA = Magnet	NAC = Magnet
	4'	40 = 4000		PA = Pivot Magnet	PAC = Pivot Magnet
	5'	50 = 5000			
	6'				

Specifications subject to change without notice

Optional dimming kit available upon request

\*\*Note: Two EFDS-1055 needed per run

\*\*\* Note: See daisy chain spec guide

This product complies with IEEE C62.41 for surge endurance up to 2.5KV. ElectraLED® recommends using the SP20-TN for additional surge protection. Surge damage is not covered by warranty.